

PATENT

DOCKET NO. KOWAL-001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor: KOWALEVICH, Peter)

Serial No.: Not Yet Assigned)

Filed: Herewith)

For: FULLY INTERLOCKING SYNTHETIC,)
SIMULATED SHAKE SIDING

REQUEST FOR FILING A UTILITY APPLICATION

Hon. Commissioner of Patents and Trademarks
Washington, DC 20231

Sir:

This is a request for filing a utility application.

1. [X] Enclosed is a complete copy of the application, including 21 pages of cover page, specification, claims, abstract, and seven (7) sheets of (informal) drawings.
2. [X] Enclosed is an Declaration and Power of Attorney (executed).
3. [X] A Verified Statement to establish small entity status under 37 CFR §§1.9 and 1.27 is enclosed (executed).
4. [X] The filing fee is calculated below:

| Col. 1 | Col. 2 | Small | Other Than | Entity | | |
|---|-----------|-----------|------------|----------|---------|-------|
| Small Entity | | | | | | |
| For: | No. Filed | No. Extra | Rate | Fee | Rate | Fee |
| Basic Fee: | | | | \$380 | | \$760 |
| Total Claims: | | 9-20= 0 | x\$ 9= | \$0 | x\$18= | \$ |
| Indep. Claims: | | 1- 3= 0 | x\$39= | \$0 | x\$78= | \$ |
| [] Multiple Dependent Claims Presented | | | +\$130= | \$ | +\$260= | \$ |
| | | Total | \$380 | or Total | \$ | |

11/29/99



5. [] The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Account No. _____. A duplicate copy of this sheet is enclosed.
6. [x] A check in the amount of \$380.00 is enclosed.
7. [] Enclosed is an Assignment to
8. [] Enclosed is a check for \$40.00 for the Assignment recordation fee.
9. [X] The power of attorney in this application is to:
- Name : Mitchell A. Stein, Esq.
Reg. No.: 30,978
10. [X] Address all future communications to:
- Mitchell A. Stein, Esq.
Reg. No. 30,978
STEIN ROSENFELD KING & KAPLAN, L.L.P.
489 Fifth Avenue, 29th Floor
New York, New York 10017
Tel. No. (212) 883-0100
11. [] A preliminary amendment is enclosed. (Claims added by this amendment have been properly numbered consecutively beginning with the number next following the highest numbered original claim in the prior application.)

By: 

Mitchell A. Stein
Reg. No. 30,978
Attorney for applicant

Dated: November 29, 1999
489 Fifth Avenue, 29th Floor
New York, New York 10017
Tel. No. (212) 883-0100

"Express Mail" mailing label No. EL158865652US
Date of Deposit: November 29, 1999

J:\Kowalevich\112999.cov

PATENT

DOCKET NO. KOWAL-001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor: KOWALEVICH, Peter)

Serial No.: Not Yet Assigned)

Filed: Herewith)

For: FULLY INTERLOCKING SYNTHETIC,)
SIMULATED SHAKE SIDING

CERTIFICATE OF EXPRESS MAILING

"Express Mail" Mailing Label No.: EL158865652US

Date of Deposit: November 29, 1999

I hereby certify that the following:

- ☒ [X] This Certificate of Express Mailing
- ☒ [X] Transmittal letter
- ☒ [X] A patent application consisting of 21 pages of title, abstract, specification, and claims
- ☒ [X] (Informal) Drawings containing the figures, consisting of seven (7) pages
- ☒ [X] Check in the amount of \$380.00 to cover filing fee
- ☐ [] Preliminary Amendment (____ pages)
- ☐ [] Certified copy/copies of priority documents, Appln. No. _____ (____ pages), Appln. No. _____ (____ pages), and Appln. No. _____ (____ pages)
- ☐ [] Information Disclosure Statement (____ pages)
- ☐ [] Copies of the patents/publications identified in the Information Disclosure Statement
- ☒ [X] Declaration and Power of Attorney (executed).
- ☒ [X] Verified Statement to establish small entity status under 37 CFR §§1.9 and 1.27 is enclosed (executed).
- ☒ [X] Return postcard

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR Section 1.10 on the Date of Deposit indicated above in an envelope addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.



Mitchell A. Stein
Reg. No. 30,978

STEIN ROSENFELD KING & KAPLAN, L.L.P.
489 Fifth Avenue
29th Floor
New York, New York 10017
(212) 883-0100

**Verified Statement (Declaration)
Claiming Small Entity Status
(37 C.F.R. §§ 1.9(f) and 1.27(b)) -
Independent Inventor**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled:

FULLY INTERLOCKING SYNTHETIC, SIMULATED SHAKE SIDING

described in

- ☒ the specification filed herewith on November 29, 1999
- ☐ application serial no. _____ filed _____
- ☐ patent no. _____, issued _____

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ no such person, concern, or organization
- ☐ persons, concerns or organizations listed below*:


***NOTE:** Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any chance in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

PETER KOWALEVICH
NAME OF INVENTOR

196 Lakeland Avenue, Apt. 6E
Sayville, New York 11782
ADDRESS

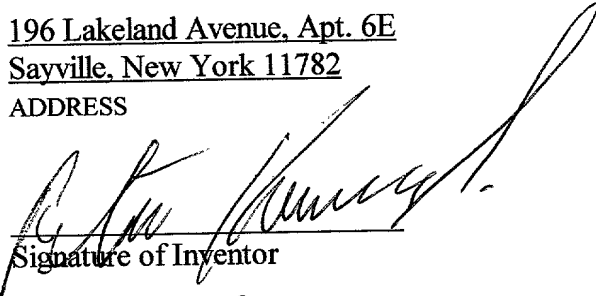
Signature of Inventor

11-28-99
Date

\\Server\drive_d\Kowalevich\112999.sme

Application for United States Letters Patent

FOR:

FULLY INTERLOCKING SYNTHETIC, SIMULATED SHAKE SIDING

INVENTOR:

PETER KOWALEVICH
196 LAKELAND AVENUE, APT. E6
SAYVILLE, NEW YORK 11782

ATTORNEYS:

MITCHELL A. STEIN, Esq., REG. No. 30,978
STEIN ROSENFELD KING & KAPLAN, L.L.P.
489 FIFTH AVENUE
29TH FLOOR
NEW YORK, NEW YORK 10017
212-883-0100 (VOICE)
212-883-0101 (FAX)

| Parameter | Value | Unit |
|------------|-------|------|
| α | 0.001 | |
| β | 0.001 | |
| γ | 0.001 | |
| δ | 0.001 | |
| ϵ | 0.001 | |
| ζ | 0.001 | |
| η | 0.001 | |
| θ | 0.001 | |
| ϕ | 0.001 | |
| χ | 0.001 | |
| ψ | 0.001 | |
| ω | 0.001 | |
| ν | 0.001 | |
| μ | 0.001 | |
| λ | 0.001 | |
| κ | 0.001 | |
| ι | 0.001 | |
| \hbar | 0.001 | |
| g | 0.001 | |
| f | 0.001 | |
| e | 0.001 | |
| d | 0.001 | |
| c | 0.001 | |
| b | 0.001 | |
| a | 0.001 | |

FIELD OF THE INVENTION

The present invention relates to the field of shake siding comprising a synthetic material for simulating natural wood effects, and more particularly to interlocking mechanisms for a lock-up shake siding.

BACKGROUND OF THE INVENTION

Over the years, exteriors of residential homes have been typically sided with materials including asbestos, wood and gypsum boards. Wood siding has come in a number of different forms, including different types of shakes (i.e., a hand-split piece of wood) with an external surface dimension or exposure of 6.5" to 14" in height, per shake and an appearance differing in wood grains, textures, and styles. Asbestos siding, now outlawed because of the toxicity associated with the material, was comprised of cement and asbestos fibers, with an exposure of 9" to 2' in height. Gypsum boards have been used to simulate wood planking.

Recently, various durable materials have been employed to replace or cover the existing exteriors. Included in such materials have been aluminum, steel, and very recently, fiberglass, polypropylene and vinyl. Fiberglass, for example shown in U.S. Patent No. 4,015,391 to Epstein, has been short-lived in application because of rotting, thereby decreasing its longevity. Coating materials were ineffective in adherence to the fiberglass. Polypropylene suffers problems in expansion and contraction and in weatherability. Consequently, it is a product that must be painted and then sealed, thereby only providing five (5) years of warranty. ABS materials, another type of plastic, have also been recently introduced, and problems associated with cracking in cold conditions have yet to be overcome.

Accordingly, the current material of choice is polyvinyl chloride, or "PVC" with added composites to create texture, and to improve weatherability for longer lasting applications.

Siding, when applied, must secure first to the exterior of the house, and second the pieces must secure to one another. Typically a starter strip or course is first applied. Then, a

sheet is attached to the starter strip and nailed to the house. Subsequent sheets must thereafter interlock to one another, in one of two possible ways. First, a "lock-up" assembly can be employed in which the interlocking occurs by way of an upwardly-directed motion. Second, a "stacking" arrangement can be employed by which the interlocking occurs by way of a downwardly-direction motion. It is generally recognized in the art that the "lock-up" assembly is preferred because assembly is quicker, and presents less stress to the attached panel as a subsequent panel is being upwardly locked in place.

The siding business has been replete with the purported inventions of others.

For example, U.S. Patent No. 3,417,531 to Jones shows a lock-up assembly for siding having beads and legs for attachment. Jones does not show a clipping assembly, and thus suffers from impractical difficulty in detachment after the paneling is applied.

U.S. Patent No. 3,703,795 to Mattes shows a two piece assembly system wherein a second piece (see, e.g., "retainer part" 84), separate and apart from the first piece, must be applied after the first piece is applied to retain the portions, and provide a lip for the subsequent sheet to be locked in place. Consequently, this discontinuous design is slow in assembly, and because of the two piece application, would generally be effective only where the exterior of the house has been configured with gypsum board or with the addition of a backing board.

U.S. Patent No. 4,186,538 to Marcum, Jr. shows a metal-specific application that typically cannot be used for plastics including PVC because the upward surface of the "hooks" 13 are rolled. While metal can be deformed easily in this manner, to do so with plastics would be cost prohibitive. Moreover, as can be observed in Marcum, Jr.'s disclosure, there is

no nailing or fastening means integral to the hooks 13, and thus hooks 13 are not engaged to the backing or exterior of the house. Accordingly, where a seam is first confronted by a hook 13 of a panel, there will be no engagement, and thus the entire sheet is likely to visibly detach after a short duration of use. Lastly, the clips are not displaced relative to the cross-section of the sheet, thus minimizing the ability to create an external surface texture of the siding.

U.S. Patent No. 4,308,702 to Rajewski addresses the issue of rolling the upward surface, as shown in Marcum, Jr., by rolling a plastic piece along fold line 50. However, plastic manufacturing does not permit such heating and rolling without sacrificing flexibility and durability at the point of the fold. In other words, the sheet is first extruded, and then thermo-formed at the point of the fold and folded upon itself, it is also folded so as to provide the flange. Such two step heating is more expensive, and the result is less flexible and durable. As a result, in operation, the sheet so folded will be more liable to crack along the fold line 50, or worse, at the flange 26, and thus be in need of more frequent replacement. Additionally, flange 26 in Rajewski is co-contiguous with the entire sheet, thus requiring the use of more material than is necessary to achieve the same or a better result. Reduction in the amount of material results in lower costs, and hence greater profits.

U.S. Patent No. 4,450,665 to Katz shows an extruded panel having a flange 135 for engaging an upwardly locking lip 150 having a bead 154. Katz is important in showing a way of having a positive engagement click resulting from the specific shapes involved. However, the nailing step as shown in Fig. 7 of Katz does not provide a double thickness through which the nail must pass. Rather, it is a single thickness and the flange depends therefrom, leaving a point of natural failure at the dependent connection when the sheets are placed under wind

load. Also, like Rajewski, the flange of Katz is contiguous with the entire length of the panel, and thus suffers from extra material costs.

U.S. Patent No. 4,669,238 to Kellis, et al. shows a discontinuous clip assembly. However, like in Mattes, Kellis, et al. provides a clip that is nailed as a separate stage, and can be placed by the installer at any location chosen. First, it must be observed that whenever the installer is given the option to "cut corners" in installation, the installer will. Accordingly, in operation, Kellis, et al. will eventually result in sheets that are not bound at specific distances (e.g., every 4") and thus the installation will be weaker. Also, the additional clip portion when added will only result in a single thickness that is nailed to the backing. Additionally, in the locations in which clips are not used, there is the natural tendency for sagging and bowing because of the obvious distance between the upper and lower interlocking pieces. Thus, in operation, Kellis, et al. is less than desirable.

U.S. Patent No. 4,864,787 to Bukowski shows a double bend in the flange, thus suffering from some of the same problems indicated above. Additionally, Bukowski nails into a single thickness, which also indicates a point of weakness. It should be appreciated that Bukowski appears to deal with the issue of edges and how sheets can connect without the need for a separate edge to be applied. This extra complication has found limited use in the industry.

U.S. Patent No.'s 5,072,562; 5,249,402; 5,347,784 to Crick, et al. show a stack-locking mechanism, and, importantly, shows that the industry is replete with simulating the surface shakes in a manner in which each shake is identical, and the spacing between each such surface shake is identical. In this manner, the industry has heretofore only provided a

simulated appearance that is so unnatural as to show that it is, in fact, not real. Apparently, heretofore no one addressed the need to vary the thickness of the lines between shakes so as to create an uneven effect more consistent with the natural material, and also to improve the shading effect.

U.S. Patent No. 5,537,792 to Moliere shows a lock up assembly formed from a single mold, in which the nailing portion is a single thickness, the flange 40 provides a narrow opening for insertion of the interlock lip 50, and the distance between shakes, i.e., the thickness of the vertical lines between shakes, is always the same.

It is thus an object of the instant invention to provide a lock-up assembly in which the locking of the interlock lip from each lower portion of a sheet is allowed a greater entry aperture than the locking the aperture for a more positive locking effect, the nailing thickness is double the traditional thickness in that nails attach both the flange portion as well as the back portion to the backing material, and the vertical lines between shakes vary to resemble more of a natural appearance.

It is an additional object of the instant invention to provide nailing substantially co-linear with the topward portion of the interlock between the lip and flange, to thereby minimize wind distortion effects.

SUMMARY OF THE INVENTION

The various features of novelty which characterize the invention are pointed out with particularity in the claims annexed to and forming a part of the disclosure. For a better understanding of the invention, its operating advantages, and specific objects attained by its use, reference should be had to the drawings and descriptive matter in which there are illustrated and described preferred embodiments of the invention.

The foregoing objects and other objects of the invention are achieved through an interlocking rectangular sheet of simulated shakes for lock-up assembly upon a structure in an upwardly directed fashion is shown having a thermo-formed base sheet with an exposure surface and a top and bottom surface. The bottom surface terminates in a cross-sectionally "U" shaped, clipping member. The top surface has a plurality of punched key portions displaced. Certain of the key portions have independent, apertured, flanged, extruded assemblies that are welded to them. All of the key portions allow for receiving securing members for attachment of the sheet to the structure, including the flanged portions. The apertured, flanged assemblies and the clipping members cooperate positively to interconnect in the upwardly directed fashion to provide, when secured to the structure by the securing members, a substantial inability to be removed or displaced by weather conditions. The flanged assemblies have an extended "S" shaped configuration. The front and back of each of the sheets have an upward and lower notched portion that provides for longitudinal engagement, one sheet against the other, by way of the front portion engaging the flange, and the rear portion engaging the "U" shaped clip.

The features of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings. It is to be understood, however, that the drawings are designed solely for purposes of illustration and not as a definition of the limits of the invention, for which reference should be made to the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, wherein similar reference characters denote similar elements through the several views:

FIG. 1 is a frontal view of a sheet with a scalloped, decorative appearance in accordance with an embodiment of the subject invention;

FIG. 2 is a frontal view of a sheet with a cedar shake, decorative appearance in accordance with an alternative embodiment of the subject invention;

FIG. 3 is a frontal view of a forward and rear edge of the shake shown in FIG. 2 in a manner indicating cooperative, positive longitudinal interlocking;

FIG.'s 4 are a multiview of the process of formation of a shake in accordance with the invention, wherein FIG. 4A shows a frontal view of a sheet prior to attachment of a clipping assembly; FIG. 4B is a cross-sectional view along line B-B shown in FIG. 4A; FIG. 4C is a frontal view of a clipping assembly prior to its engagement on the sheet shown in FIG. 4A; and FIG. 4D is a cross-sectional view along line D-D of FIG. 4A;

FIG. 5A is a frontal view of a continuous dual clipping assembly in accordance with the preferred embodiment of the subject invention;

FIG. 5B is a frontal view of a continuous clipping assembly in accordance with another embodiment of the subject invention;

FIG. 6A is a cross-sectional view along line 6A-6A in FIG. 1;

FIG. 6B is a cross-sectional view along line 6B-6B in FIG. 2; and

FIG. 7 is a cross-sectional view showing a flange and conforming clip in assembled formation.

FIG. 7 is a cross-sectional view showing a flange and conforming clip in assembled formation.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In accordance with the subject invention, and with particular reference to FIG. 1, a sample sheet in final form 2 is shown from a frontal view, in which a decorative scalloped shakes 10 are indicated. It should be appreciated that while a scalloped shape is shown in FIG. 1, other and varied shapes can be used without deviating from the letter and spirit of the subject invention. Such other shapes include, by way of example, diamond cut, triangular cut, and any other usual and unusual shapes.

In the particular scalloped shake 10 shown in FIG. 1, each of the shakes are 4 inches wide. The sheet 2, itself, is 8 inches high, with an exposure of 6 1/2 inches in exposure. By exposure, it is meant the actual height that is "exposed" to the elements. It is understood that the sheets in accordance with the subject invention are lock-ups, meaning that the lock upwardly from the bottom to the top, with various portions covered below the exposed height.

Sheet 2 has a top edge 4, bottom edge 6, forward edge 14 and rear edge 18. In this embodiment, sheet 2 is 8 feet in length and 8 inches in height. Sheet 2 has a forward edge notch 16 and a rear edge notch 20 for positive, longitudinal engagement, shown in greater detail in FIG. 3. In this embodiment, forward edge notch 16 is 3/4 inches in height and 1 inch in width. Rear edge notch 20 is between 1/16 and 3/16 inches in height and 1 inch in width. In certain of the sheets heretofore known in the industry, the spaces between the scalloped portions are removed for appearance. However, in the subject invention the spaces remain such that the sheet is, in fact, fully rectangular in dimension. These extra spaces between the shapes thereby provide greater overall strength to the sheet, and allow the sheet to brave the

elements without deformation or other physical changes that result in a change in appearance or effective protection to the underlying structure.

In the embodiment shown in FIG. 1, there is also a spacing 22 between the individual scalloped portions 10 which, in this embodiment, are fixed at a distance shown to be $\frac{1}{2}$ inch.

Critical to the subject invention are the proliferation of nailing slots 8a and 8b which are equally and continually spaced parallel to the top edge 4, as shown in FIG. 1. Nailing slots 8a are of stretched elliptical configuration to allow the placement of a nail anywhere within the slot. It should be appreciated that this slot also provides the ability to screw or staple the sheet to the underlying backing surface. Slots 8A and 8B are 1 inch in length, and about $\frac{3}{8}$ inches in height, with a 4 inch center to center distance between them.

Importantly, slots 8B have sonically welded about them a clipping flange 12. The process for keying to the slots and engaging and welding flanges 12 are described in greater detail in connection with FIG.'s 4. It should be observed that the sheet 2 can be nailed at each of slots 8A and 8B, displaced every four inches, which ensures that regardless of where an edge falls, it can be secured to the surface and thereby prevent the opportunity for wind damage at such corners or edges.

Like FIG. 1, FIG. 2 shows a similar embodiment, in which sheet 2 is comprised of a "perfection" wood shake surface 26. Importantly, the wood shake surface 26 is configured to truly reflect a wood shake surface, in that it comprises shakes of different heights and widths as shown by 24A and 24 B. As a result, the distance between the shakes varies between 22A of $\frac{1}{8}$ inch, 22b of $\frac{1}{4}$ inch and 22C of $\frac{3}{8}$ inches. It should be appreciated that other

variations can be employed to simulate a real wood effect. The dimensions of this sheet are the same as that shown in FIG. 1, and like elements possess like identifying numbers.

FIG. 3 shows a rear edge 18 and forward edge 14 with notches 16 and 20 in a manner that provides positive, longitudinal interlocking between two sheets, along the direction of arrow 28. In this embodiment, notch 16 abuts flanged clipped assembly 42 perpendicular to the top edge 4, while simultaneously notch 20 slidably engages in the lower clip 44. Clip 44 is shown in greater detail in FIG. 4B. In this manner, the two sheets connect without interruption and appear to be continuous on the wall. The spacing is established to enable the continued four inch centers between nailing slots 8A and 8B. Spacing 22 (as well as 22A, B and C for a wood shake) are also thereby maintained with a margin of 1/16 inch in order to provide expansion and contraction occasioned by thermal changes.

FIG. 4 shows a composite of FIG.'s 4A, 4B, 4C and 4D, revealing the stages in development of the final sheet. In this regard, the sheet 2 is first extruded, then molded to the conformation shown in FIG. 4A, in which keys 32A and 32B are provided as raised protrusions that allow accurate location of each of flanged assemblies 42. Flanged assemblies 42 comprise apertures 34 which are the same size as the protruding keys 32A and 32B, so that assemblies 42 can be placed thereupon and then sonically welded to the surface 30 (along the dotted lines shown bridging FIG.'s 4C and 4A).

Generally the material used for all of these assemblies has a thickness of 50-53 gauge. Fig. 4B shows a cross section along line B-B of Fig. 4A, in which protrusion 32A is shown outwardly directed from surface 30, and surface 30A, comprising the front of the scallop to the bottom edge 6 is shown. It should be appreciated that any of the number of other shake

appearances can be used with the configurations shown in FIG.'s 4 without deviating from the invention.

As further shown in FIG. 4B, the sheet 2 is continuous from its top edge 4, through the nailing key 32, through surface 30, through scallop 30A, to bottom edge 6, and extends thereafter to form rearward clip 44. This clip 44, as described in greater detail below, mates with flange 12 for positive latitudinal interlocking of the sheets as they are attached in the lock up engagement.

As shown in FIG. 4D, which is a cross-section along line D-D shown in FIG. 4A with a flanged clip assembly 42 attached thereto, flanged assembly 42 has nailing key 32 passed through its aperture 34, and sonically welded thereupon. Flange 12 is downwardly directed in an "S" type configuration having a first portion 12A which resides parallel to surface 30, then to an angular deformation 12B, to another parallel extension 12C, to a final angular deformation 12D. In this manner, flange 12 creates an opening that is larger in size than the final width, in which the clip 44 is passed for clipped attachment.

In all of FIG.'s 4, nailing keys 32A and 32B are shown. After the sonic welding of flanged assemblies 42 to about respective keys 32B to surface 30, the nailing keys 32A and 32B are then punched by the sonic welder, and removed, leaving apertures 8A and 8B, as shown in FIG.'s 1 and 2, for nailing.

FIG. 4 shows individual flanged assemblies 42 for engagement. Alternatively, and in accordance with a present preferred embodiment, an array of two assemblies can be provided coextensively with one another as shown by the continuous dual clip assembly 36 in FIG. 5A. In this manner, two flanged assemblies 42 are connected to one another such that flanges 12

are of the same dimension as that shown in FIG. 's 4. The length of this assembly 36 is preferably between 21.5 inches and 27.5 inches, still leaving the four inch centers for attachment to the nailing keys 32A and 32B.

An alternative embodiment, as shown in FIG. 5B, has a continuous clip assembly 38, with a continuous flange 40. Apertures 34 and centers between them are still maintained.

It should be appreciated that the cross-section of each of the flanged portions in FIG. 5A and FIG. 5B are the same, as the flange 12 shown in FIG. 4D.

FIG. 's 6A and 6B show cross-sections along line 6A-6A of FIG. 1 and line 6B-6B of FIG. 2, for each of the decorative panel and shake panel embodiments, respectively. In this regard, apertures 8B are shown for nailing, indicating that the sonic removal step of the keys 32B has already occurred. In these cross-sectional representations, clip assembly 42 is shown, as well as the lower clip assembly 44. Surfaces 30A and 30B are shown, and back walls 46A and 46B are also shown. It should be recognized that these back walls are produced by the molding of the spaces 22 and 22A, B and C, thereby leaving a lesser gap for clip 44 than that shown in FIG. 4B. Because of the spacing, where independent clip assemblies 42 are used, the flange 12 will not engage at the cross-sections shown in FIG. 's 6A and 6B, but rather engage the cross-sectional area shown in FIG. 4B (between the spaces 22, 22A, 22B, and 22C).

Engagement between clips 44 and flanged assemblies 42 are shown in FIG. 7, which indicates the manner by which clip 44 is slidably mounted within the recesses created by flange 12. The initial extension provided by the final angular deformation 12D creates a larger aperture for more easily engaging the clip 44. Likewise, angular deformation 12B

creates a distance "D" between second parallel extension 12C and surface 30 just slightly greater than the thickness of clip 44, thereby frictionally and compressionally engaging the clip 44, as shown in FIG. 7. In this manner, ease of assembly, with positive latitudinal interlocking is achieved.

While there have been shown, described and pointed out fundamental novel features of the invention as applied to preferred embodiments thereof, it will be understood that various omissions and substitutions and changes in the form and details of the device illustrated and in its operation may be made by those skilled in the art without departing from the spirit of the invention. It is the intention, therefore, to be limited only as indicated by the scope of the claims appended hereto.

CLAIMS

I claim:

1. An interlocking rectangular sheet of simulated shakes for lock-up assembly upon a structure in an upwardly directed fashion, the sheet having a top and a bottom location, the top location at a level higher than the bottom location, comprising:

- (a) a thermo-formed base sheet having an exposure surface;
- (b) a cross-sectionally "U" shaped, clipping member configured substantially along the bottom location of the sheet and below said exposure surface;
- (c) a plurality of punched key portions displaced along the top location of the sheet and above said exposure surface;
- (d) a plurality of independent, apertured, flanged, extruded assemblies weldedly, flexibly attached about less than all of said punched key portions, such that all of said apertures on said flanged assemblies and all of said punched key portions that lack said flanged assemblies, provide locations for receiving securing members for attachment of the sheet to the structure; and
- (e) such that said apertured flanged assemblies and said clipping members cooperate positively to interconnect in the upwardly directed fashion to provide, when secured to the structure by the securing members, a substantial inability to be removed or displaced by weather conditions.

2. The sheet of claim 1, wherein the top portion of the sheet defines a top surface above said exposure surface, and said flanged assemblies comprise a cross-sectional

conformation having a first portion parallel to and abutting said top surface, a second portion angularly, outwardly deformed from said first portion, a third portion extended substantially parallel to said first portion, and a fourth portion angularly, outwardly deformed from said third portion, thereby creating an aperture for receiving a "U" shaped clipping member from a second sheet and channeling said second sheet clipping member into secured, interlocking upwardly-directed attachment between said top surface and said first portion.

3. The sheet of claim 1, wherein said base sheet further comprises a front portion and a back portion that are substantially perpendicular to the top and bottom locations, and said front portion has a top notch proximate to the top location, and said back portion has a bottom notch proximate to the bottom location, such that a first and a second of the sheets are capable of secured, interlocking, longitudinal attachment by said top notch overlapping the top surface and slidably engaging one of said flanged assemblies, and said bottom notch underlapping said "U" shaped clipping member for slidable engagement into the "U" portion thereof.

4. The sheet of claim 3, where the top notch possess a stop portion that abuts said one of said flanged assemblies when said first and second sheets are secured to one another.

5. The sheet of claim 1, wherein said base sheet further comprising a plurality of simulated cedar shake appearances, and between each of said appearances is an indented, vertical region to demarcate individual shakes characteristic of natural materials.

6. The sheet of claim 5, wherein said vertical regions have varying widths to further enhance the simulated characteristics of natural materials.

7. The sheet of claim 1, wherein said exposure surface comprises a simulated wood grain appearance.


8. The sheet of claim 1, wherein said exposure surface comprises a simulated wood texture.

9. The sheet of claim 1, wherein said exposure surface comprises a simulated wood color and shading.

ABSTRACT

An interlocking rectangular sheet of simulated shakes for lock-up assembly upon a structure in an upwardly directed fashion is shown having a thermo-formed base sheet with an exposure surface and a top and bottom surface. The bottom surface terminates in a cross-sectionally "U" shaped, clipping member. The top surface has a plurality of punched key portions displaced. Certain of the key portions have independent, apertured, flanged, extruded assemblies that are welded to them. All of the key portions allow for receiving securing members for attachment of the sheet to the structure, including the flanged portions. The apertured, flanged assemblies and the clipping members cooperate positively to interconnect in the upwardly directed fashion to provide, when secured to the structure by the securing members, a substantial inability to be removed or displaced by weather conditions. The flanged assemblies have an extended "S" shaped configuration. The front and back of each of the sheets have an upward and lower notched portion that provides for longitudinal engagement, one sheet against the other, by way of the front portion engaging the flange, and the rear portion engaging the "U" shaped clip.

$\frac{1}{\sqrt{2}} \begin{pmatrix} 1 & i \\ 0 & 1 \end{pmatrix}$

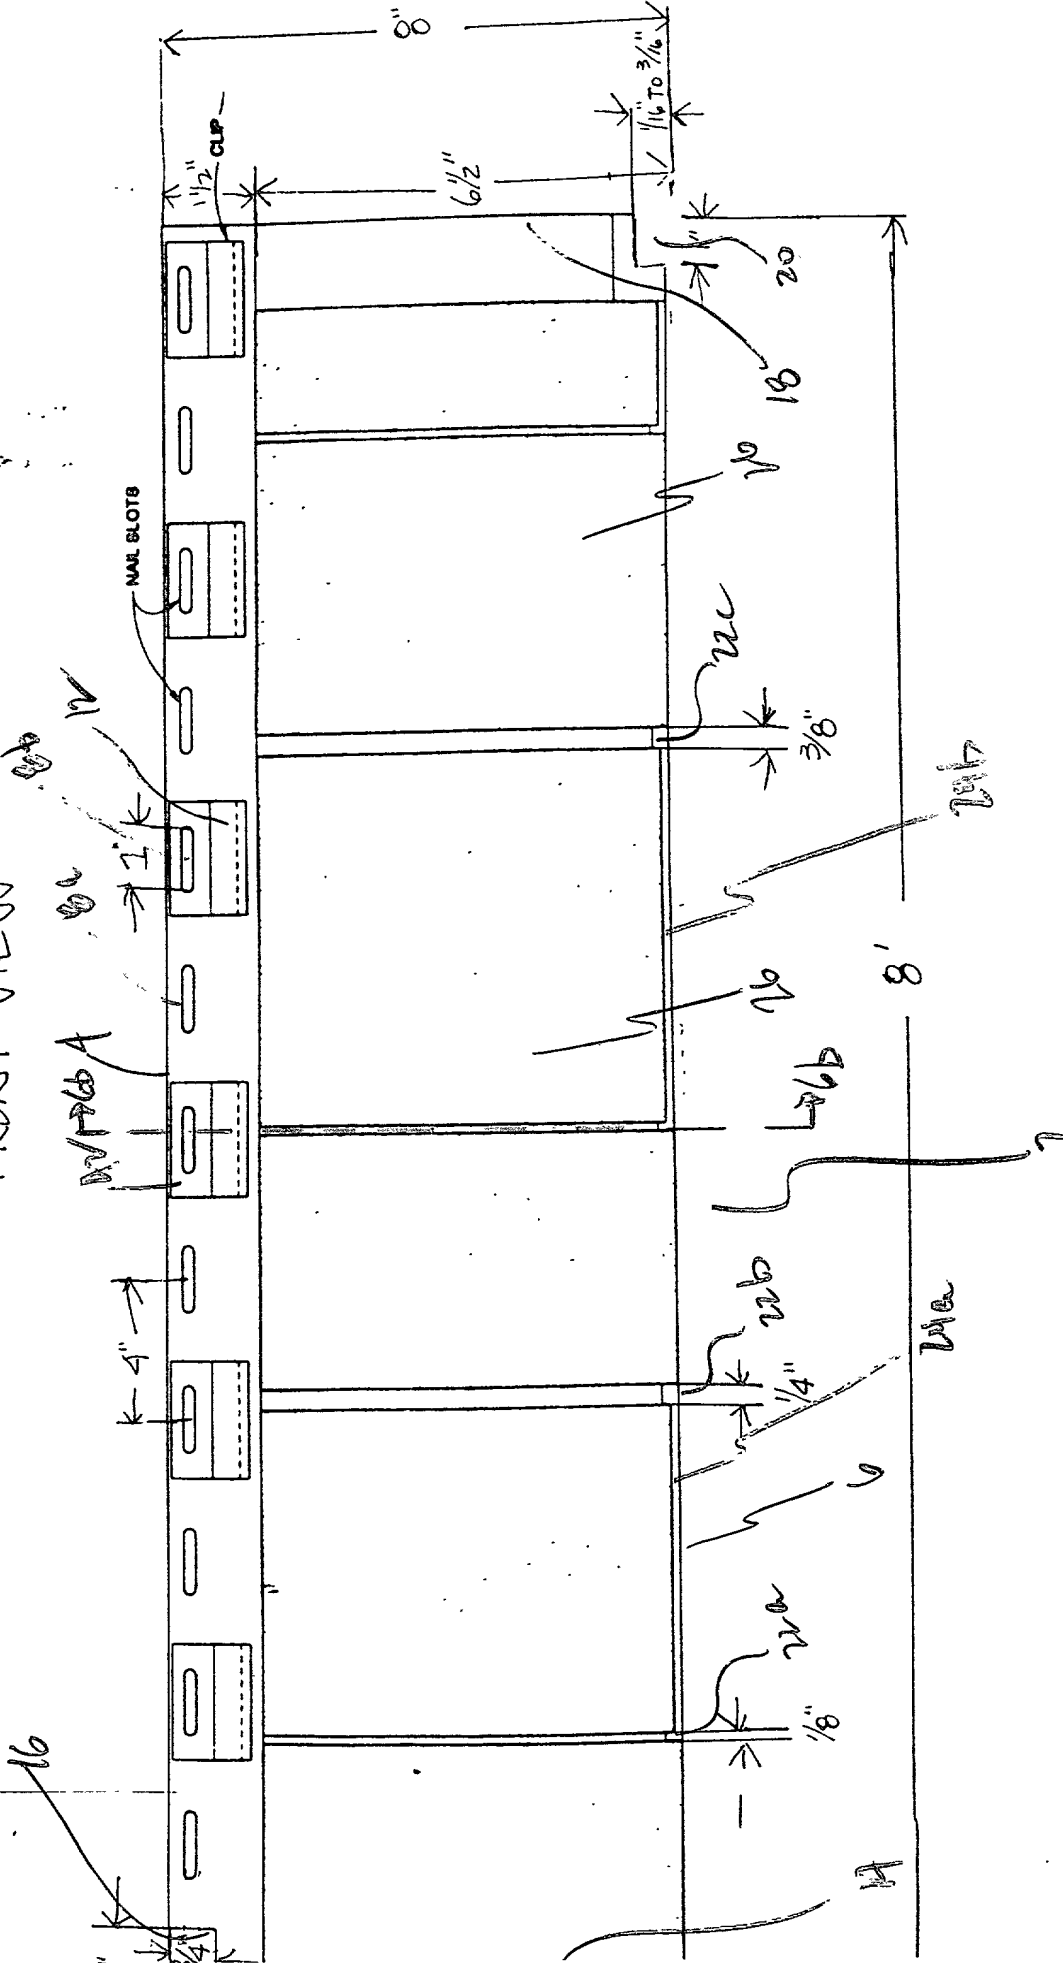

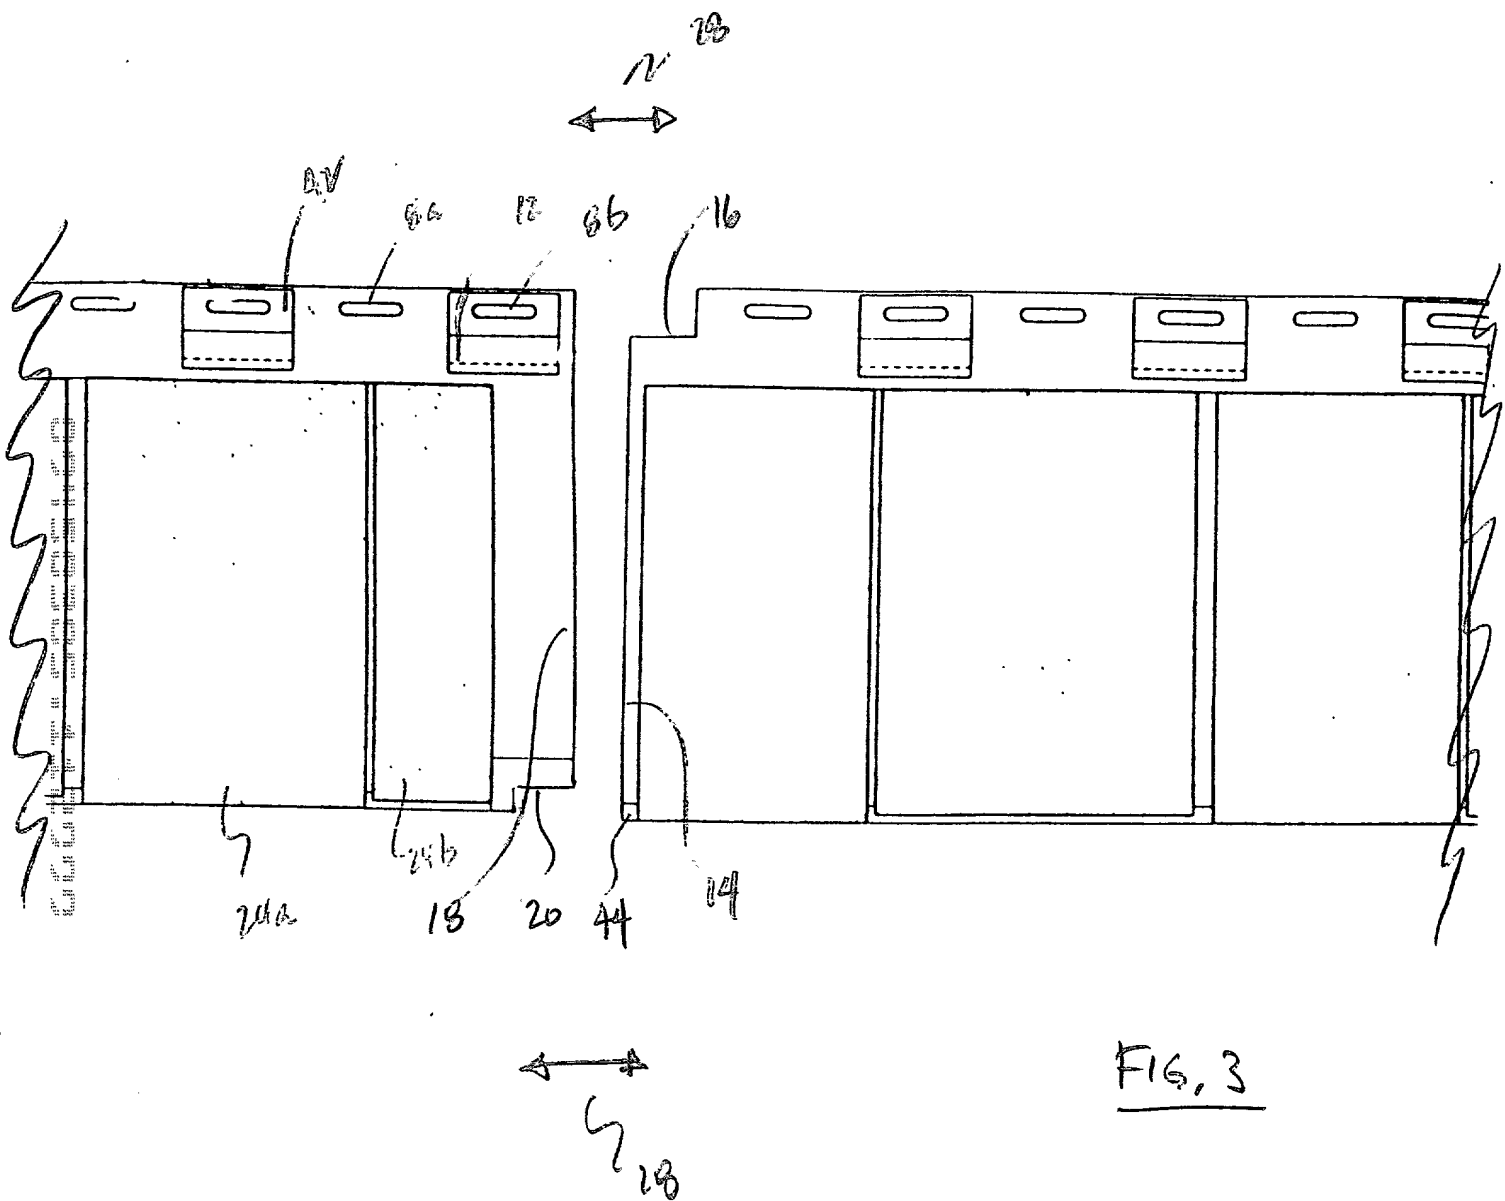


FIG. 3






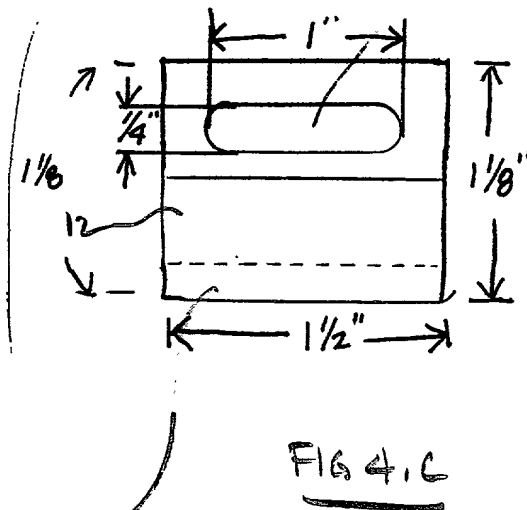


FIG. 4

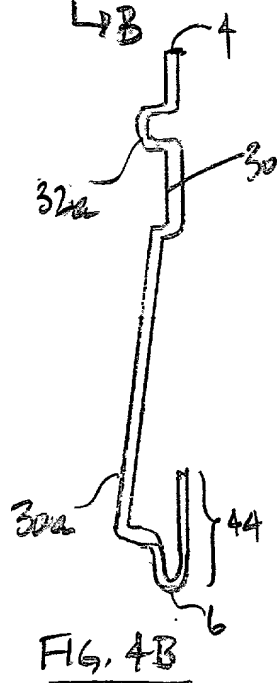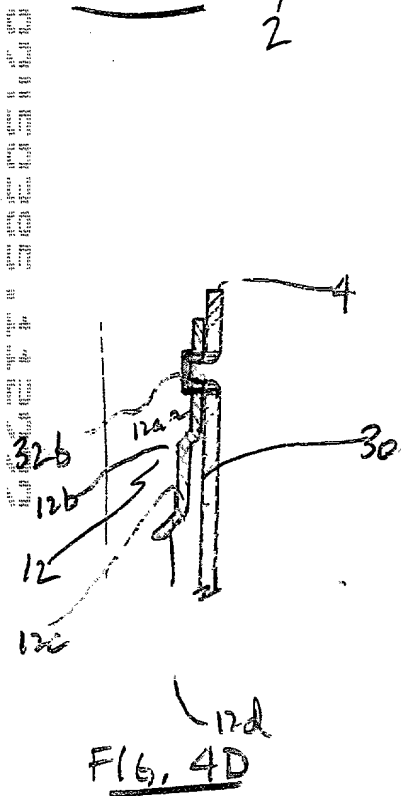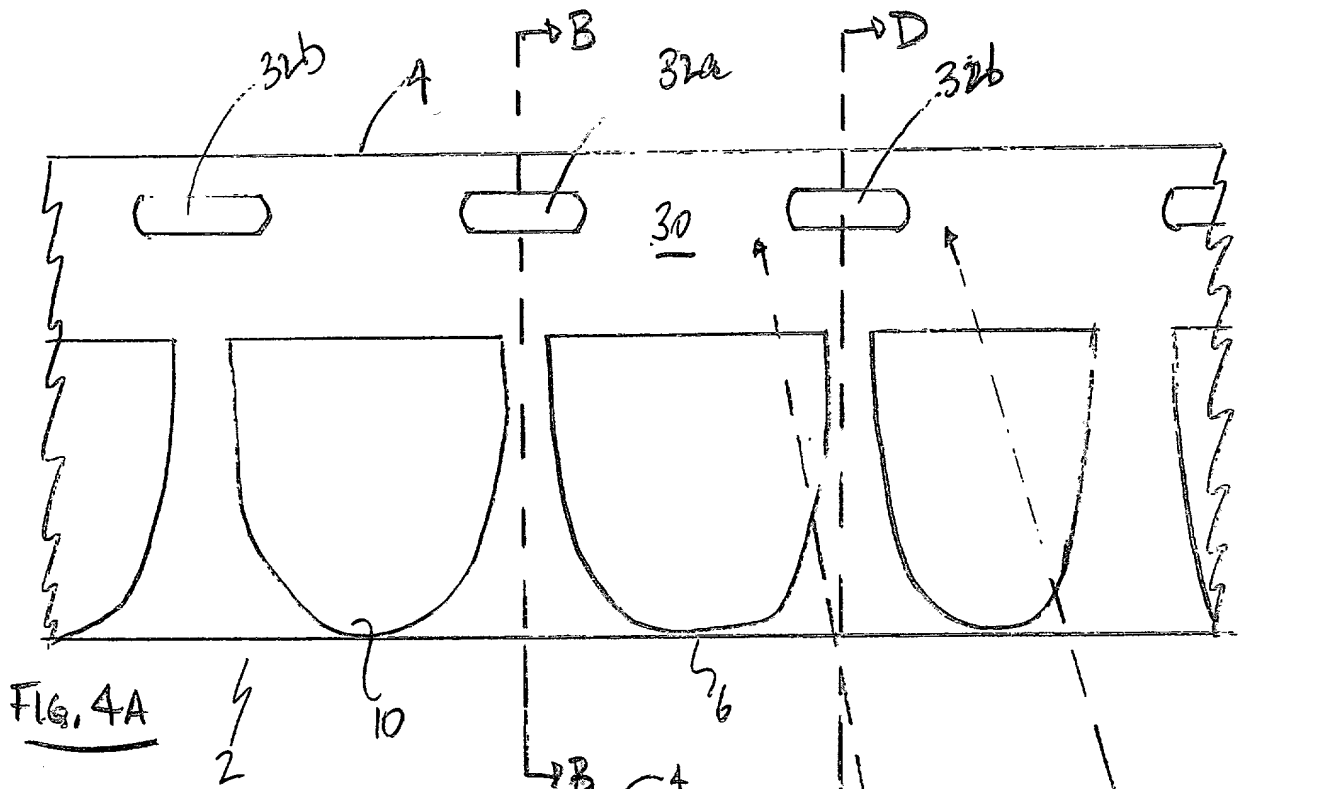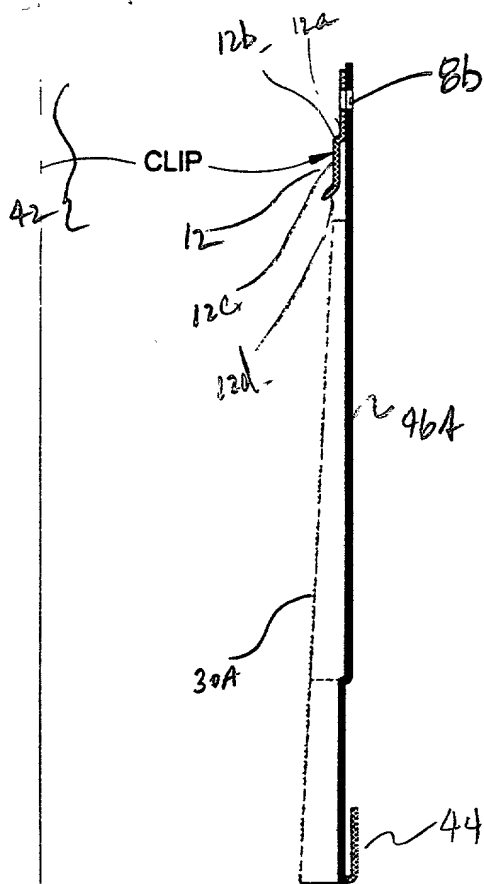


SECTION

FIG. 6A
DECORATIVE PANEL

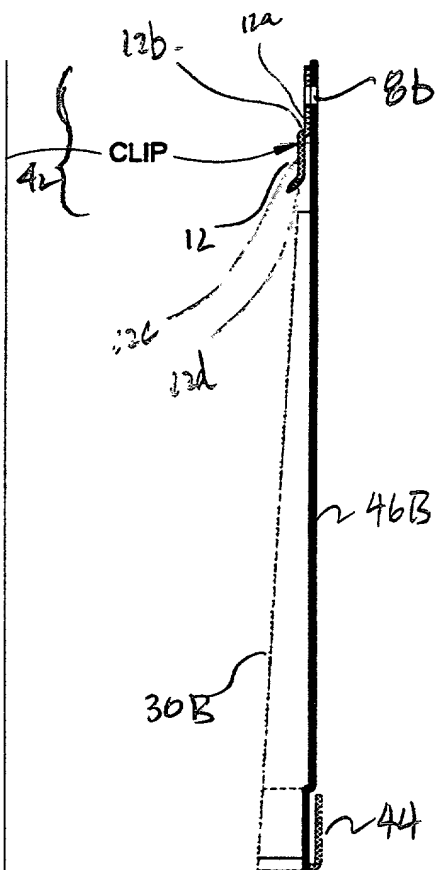

SECTION

FIG. 6B
SHAKE PANEL

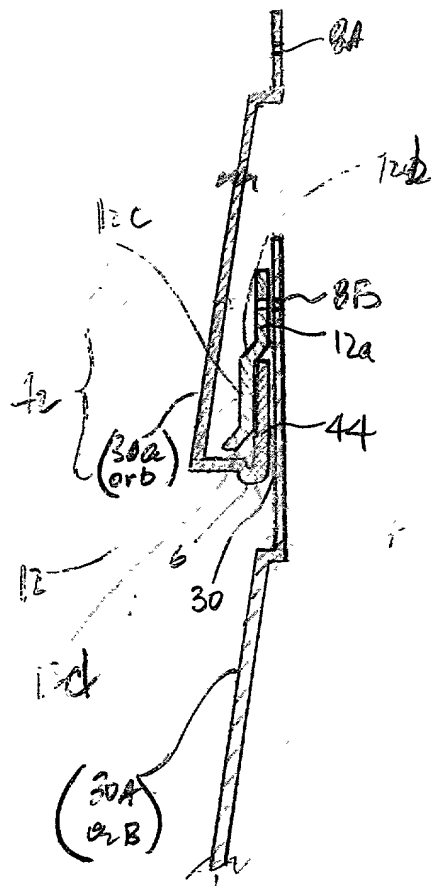

151

FIG. 7

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship is as stated below next to my name.

I believe I am the original and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled

FULLY INTERLOCKING SYNTHETIC, SIMULATED SHAKE SIDING

the specification of which is filed concurrently herewith.

I hereby state that I reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I also acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37 CFR 1.63(d), which occurred between the filing date of the prior application and the filing date of the continuation-in-part application, if this is a continuation-in-part application.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for the patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application: None

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

MITCHELL A. STEIN, Reg. 30,978.

Address all telephone calls to: Mitchell A. Stein at telephone No. (212) 883-0100.

Address all correspondence to:

Mitchell A. Stein, Esq.

Stein Rosenfeld King & Kaplan, L.L.P.


489 Fifth Avenue

29th Floor

New York, New York 10017

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: KOWALEVICH, Peter

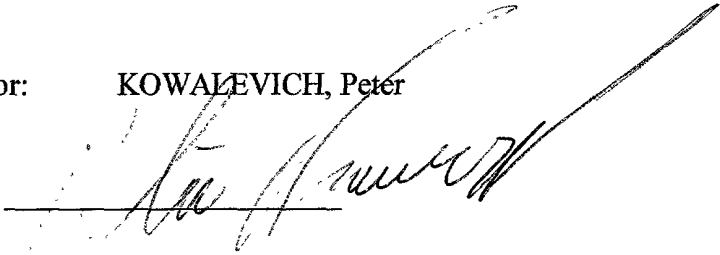Inventor's signature: 

Date: Nov. 28, 1999

Residence: Sayville, New York

Citizenship: USA

Post Office Address: 196 Lakeland Avenue, Apt. E6
Sayville, New York 11782

\\Server\drive_d\Kowalevich\112899.dec